

MORE LIGHT

JDL-BAB-20-19-915-TE-80-2.0

## High-power diode laser bars: 915 nm, 80 W cw

### Features

- High laser power
- High efficiency
- Long lifetime, high reliability
- Excellent beam characteristics

### Applications

- Pumping of solid-state lasers and fiber lasers
- Industrial, scientific and medical systems
- Printing industry
- Defense and security

# High-power diode laser bars | 915 nm, 80 W cw JDL-BAB-20-19-915-TE-80-2.0

## Specifications

## JDL-BAB-20-19-915-TE-80-2.0

| Operation*                          | Symbol               | Min  | Nom          | Max   | Unit          |
|-------------------------------------|----------------------|------|--------------|-------|---------------|
| Wavelength (cw)                     | $\lambda$            | 910  | 915          | 920   | nm            |
| Optical Output Power                | $P_{opt}$            |      | 80           |       | W             |
| Operation Mode                      |                      |      | cw, switched |       |               |
| Power Modulation                    |                      |      | 100          |       | %             |
| <b>Geometrical</b>                  |                      |      |              |       |               |
| Number of Emitters                  |                      |      | 19           |       |               |
| Emitter Width                       | W                    | 90   | 100          | 110   | $\mu\text{m}$ |
| Emitter Pitch                       | P                    |      | 500          |       | $\mu\text{m}$ |
| Filling Factor                      | F                    |      | 20           |       | %             |
| Bar Width                           | B                    | 9600 | 9800         | 10000 | $\mu\text{m}$ |
| Cavity Length                       | L                    | 1980 | 2000         | 2020  | $\mu\text{m}$ |
| Thickness                           | D                    | 115  | 120          | 125   | $\mu\text{m}$ |
| <b>Electro Optical Data*</b>        |                      |      |              |       |               |
| Fast Axis Divergence (FWHM)         | $\theta_{\perp}$     |      | 27           | 30    | $^{\circ}$    |
| Fast Axis Divergence**              | $\theta_{\perp}$     |      | 47           | 51    | $^{\circ}$    |
| Slow Axis Divergence at 80 W (FWHM) | $\theta_{\parallel}$ |      | 6            | 8     | $^{\circ}$    |
| Slow Axis Divergence at 80 W**      | $\theta_{\parallel}$ |      | 8            | 9     | $^{\circ}$    |
| Pulse Wavelength                    | $\lambda$            | 903  | 908          | 913   | nm            |
| Spectral Bandwidth (FWHM)           | $\Delta\lambda$      |      | 2            | 3     | nm            |
| Slope Efficiency***                 | $\eta$               | 1.0  | 1.15         |       | W/A           |
| Threshold Current                   | $I_{th}$             |      | 6            | 8     | A             |
| Operating Current                   | $I_{op}$             |      | 76           | 84    | A             |
| Operating Voltage                   | $V_{op}$             |      | 1.8          | 2.0   | V             |
| Series Resistance                   | $R_s$                |      | 4            | 7     | m $\Omega$    |
| Degree of TE Polarization           | $\alpha$             | 98   |              |       | %             |
| EO Conversion Efficiency***         | $\eta_{tot}$         | 56   | 62           |       | %             |

\* Mounted on a heat sink with  $R_{th} = 0.7 \text{ K/W}$ , coolant temperature  $25 \text{ }^{\circ}\text{C}$ , operating at nominal power


\*\* Full width at 95 % power content

\*\*\* Item may change upon notice and acceptance by Jenoptik, due to future improvements of technology or processing

Note: Nominal data represents typical values.

Safety Advice: Laser bars are the active components in high-power diode lasers in accordance to IEC standard class 4 laser products. As delivered, laser bars cannot emit any laser beam. The laser beam can only be released if the bars are connected to a source of electrical energy. In this case, IEC-Standard 60825-1 describes the safety regulations to be taken to avoid personal injury.

## Power - Current - Voltage - Characteristics\*

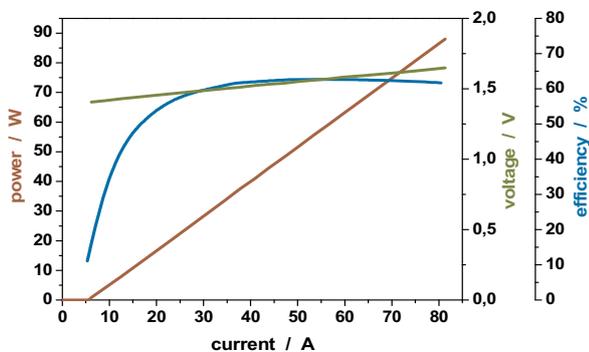

## Spectral Characteristics\*

